



# Vacuum Glass Lifter

## serie VEB4 RCMBM 400 kg



### Technical specification

Application	Glass panels
Lifting capacity	Max 400 kg
Suction pads	No. 4 round suction pads diameter 310 mm Lipped pads with safety ring
Load movement	Continuous 360 degree manual rotation 90 degree manual tilt
Pad spread	4 pads configuration mm 863 x 666 – 1166 x 861
Operating system	Electric operated 400V 3 phase 50Hz OR 220V single fase 50Hz
Vacuum system	Single vacuum circuit As optional dual vacuum circuit
Weight of lifter	60 kg
Control	Manual suction / release valve on lifter Release of the load by dual action security command
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit Battery charger for alarm system Vacuum filter Multi position hook connection

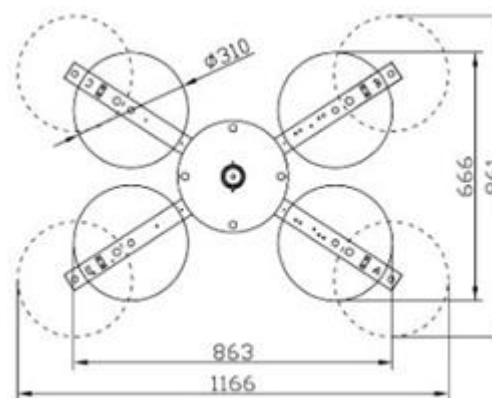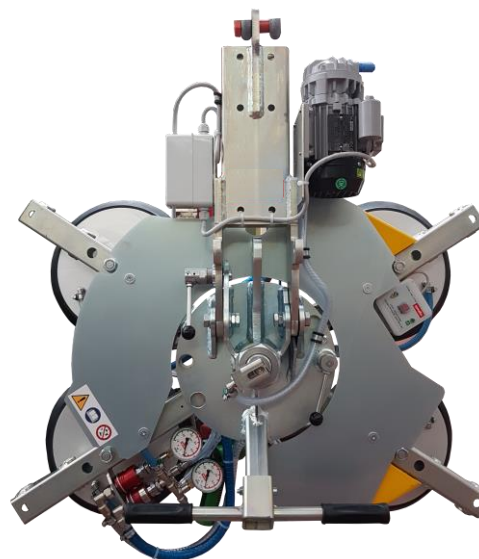

- **electric operating system**

- 4 suction pads

- Manual continues 360° rotation
- Manual 90° tilt

- Lifting capacity 400 kg

- Safety devices

### OPTIONAL:

- ✓ Dual vacuum circuit built to EN13155 standard

- PRO version with extension arms

