


# Vacuum Glass Lifter

## Serie VEB-L-FV



### Technical specification

Application	Glass panels		
Lifting capacity	Depends from the model 350 – 650 -1000 kg		
Suction pads	No. round suction pads diameter 390 mm Lipped pads with safety ring		
Load movement	Fixed in vertical position		
Pad spread	VEB2L-FV mm 1240 x 390 VEB4L-FV mm 2060 x 390 VEB6L-FV mm 2880 x 390		
Operating system	Electric power 400V 3 phase 50Hz OR 220V 1 phase 50Hz		
Vacuum system	Single vacuum circuit with vacuum reserve and non return valve		
Control	Manual on off valve on the lifter's frame Release of the load by dual action security command Remote control as optional		
Standard features	Audible and visual low vacuum warning devices Vacuum gauge for each vacuum circuit Vacuum filter Multi position hook connection		
Models	Order code	Capacity kg	No of pads
	VEB2L-FV	350	2
	VEB4L-FV	650	4
	VEB6L-FV	1000	6

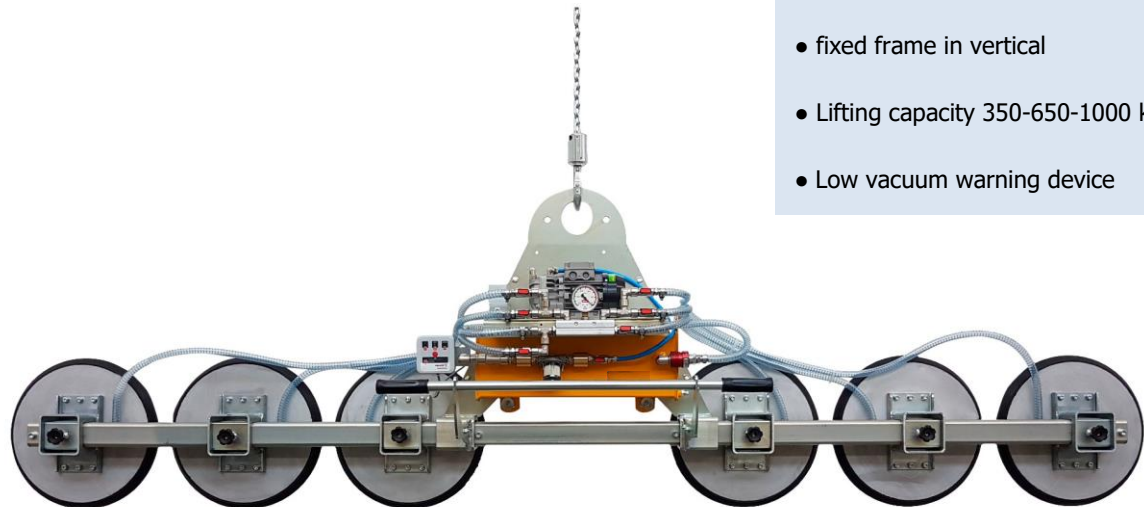

- electric operating system
- fixed frame in vertical
- Lifting capacity 350-650-1000 kg
- Low vacuum warning device