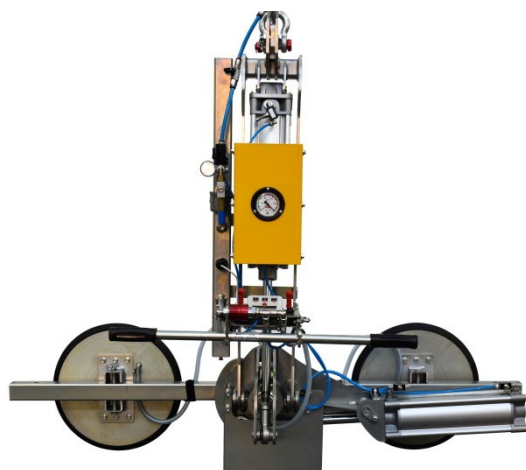


Vacuum glass lifter

Model

VA2RP180BP d4

**Kg max
300**
AIR Power supply
Compressed Air


VA2RP180BP d4 is a **pneumatic vacuum glass lifter specific for indoor use**, with two suction pads d. 390 mm and working load limit up to 300Kg. The pads are replaceable along the beam in different positions. The standard central beam is 1500mm long, on request different lengths.

The lifter features **0 - 180° pneumatic rotation** and **0 – 90° pneumatic tilt**. It is equipped with an **audio-visual alarm unit** that warns the operator of any possible dangerous situations. The vacuum gauge with coloured scale allows constant control of the vacuum level in the circuit. The lifter features a filtering system for dust and condensation.

Technical specification

Application	Glass panels
Lifting capacity	Max 300 kg
Suction pads	No. 2 round suction pads diameter 390 mm Lipped pads with safety ring
Pad spread	Max spread: mm 1740 x 390 Min spread: mm 890 x 390
Load movement	0 - 180° pneumatic rotation, controlled by joystick 0 - 90° pneumatic tilt, controlled by joystick
Operating system	Compressed air
Vacuum system	Single vacuum circuit with vacuum reserve and non-return valve
Weight of lifter	Kg 95
Control	Manual on off valve on the lifter's frame Release of the load by dual action security command
Standard features	Audible and visual low vacuum warning devices Vacuum gauge, vacuum filter, Adjustable pads in 3 positions



Indoor use



Safety devices



Pneumatic tilt 0-90°



Pneumatic rotation 180°


**made in
ITALY**


Vacuum glass lifter

Technical drawings

