


Vacuum Glass Lifter

serie VA4 RCMBP



Technical specification

| | |
|-------------------|--|
| Application | Glass panels |
| Lifting capacity | Max 400 kg |
| Suction pads | No. 4 round suction pads diameter 310 mm Lipped pads with safety ring |
| Load movement | Continuous 360 degree rotation, with possibility of automatic locking at each 90° 90 degree pneumatic tilt |
| Pad spread | Various pads configurations Min about 1000x700 mm Max about 1600x1100 mm |
| Operating system | Compressed air |
| Vacuum system | Single vacuum circuit with vacuum reserve and non return valve |
| Weight of lifter | 70 kg |
| Structural depth | mm 250 |
| Control | Manual on off valve on the lifter's frame Release of the load by dual action security command |
| Standard features | Audible and visual low vacuum warning devices Vacuum gauge Vacuum filter Adjustable pad arms position Adjustable pads position |

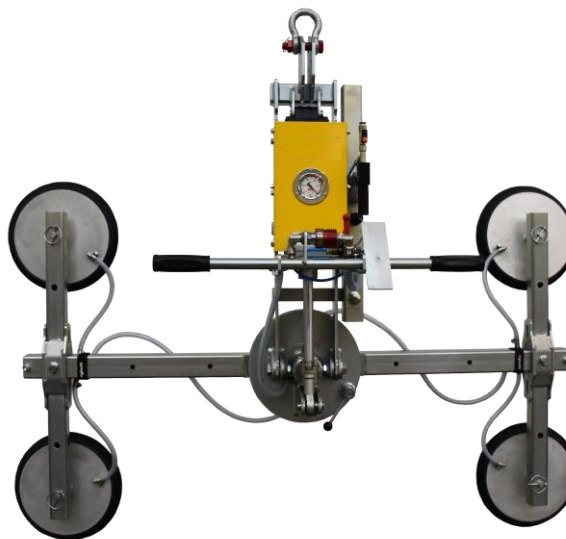

- **compressed air operating system**
- 4 suction pads
- Manual continues 360° rotation
- Powered 90° tilt
- Lifting capacity 400 kg
- Low vacuum warning device

INDOOR USE

