


Vacuum Metal Sheet Lifter serie F8B 2400



Technical specification

Application	Metal sheet, stainless steel, aluminum, plastic panels
Lifting capacity	2400 kg
Suction pads	No. 8 suction pads in vulcanized rubber, diameter 390 mm Suction pads with spring supports Exclusion of suction pads by cross arm
Frame	Steel frame structure fixed in horizontal position The suction pads are distributed on three cross arms Adjustable position of suction pads and of cross arms
Operating system	DC vacuum pump powered from on-board batteries high capacity re-chargeable batteries battery status indicator economizer for reduction of the energy consumption battery charger included
Vacuum system Safety systems	Vacuum circuit with vacuum reservoir, non-return valve, vacuum filter Vacuum gauge with colored scale Audio visual low vacuum warning powered independently and with back up battery
Weight of lifter	Depends on the configuration
Command	Suction and release by slide valve command with safety system

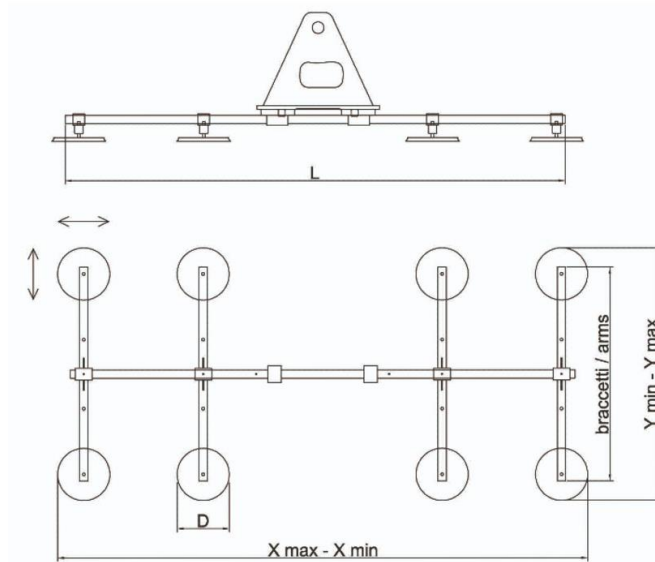

• Battery operating system

- 8 suction pad d.390 mm
- fixed frame for horizontal lifting
- lifting capacity 2400 kg
- Safety devices

Available models

Pads		Capacity	L	Arms		X (mm)		Y (mm)		Product Code
nr.	Ø	kg	mm	nr.	mm	min*	max	min	max	
8	390	2400	3000	4	750	2530*	3230	800	1080	F8B2400/4-3000/750
					1270	2530*	3230	720	1580	F8B2400/4-3000/1270
				4	1270	2530*	4230	720	1580	F8B2400/4-4000/1270

* minimum quota considering the exclusion of lateral arms and using only the 4 central pads: 1250mm

