


Vacuum Metal Sheet Lifter serie F8EB 1500



Technical specification

Application	Metal sheet, stainless steel, aluminum, plastic panels
Lifting capacity	1500 kg
Suction pads	No. 8 suction pads in vulcanized rubber, diameter 310 mm Suction pads with spring supports Exclusion of suction pads by cross arm
Frame	Steel frame structure fixed in horizontal position The suction pads are distributed on three cross arms Adjustable position of suction pads and of cross arms
Operating system	Electric 400V 3 phase 50Hz or 220V 1 phase 50Hz > to specify at order
Vacuum system Safety systems	Vacuum circuit with vacuum reservoir, non-return valve, vacuum filter Vacuum gauge with colored scale Audio visual low vacuum warning powered independently and with back up battery
Weight of lifter	Depends on the configuration
Command	Suction and release by slide valve command with safety system

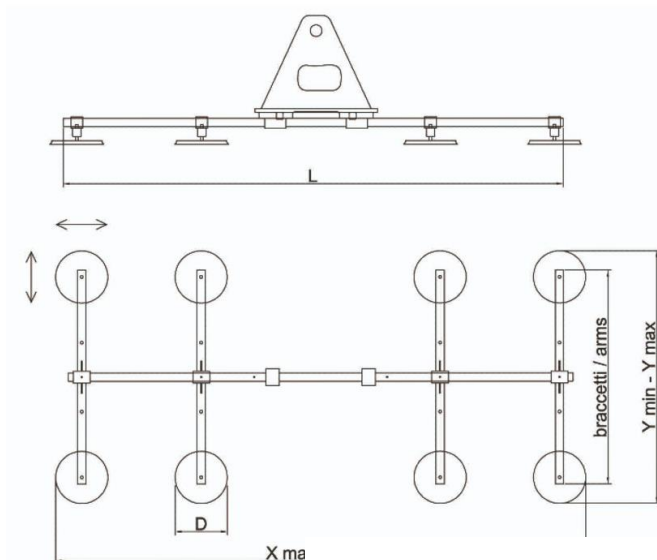

- Electric operating system
- 8 suction pad d.310 mm
- fixed frame for horizontal lifting
- lifting capacity 1500 kg
- Safety devices

Available models

Pads		Capacity	L	Arms		X (mm)		Y (mm)		Product Code
nr.	Ø	kg	mm	nr.	mm	min*	max	min	max	
8	310	1500	3000	4	750	2450	3150	720	1000	F8EB1500/3-3000/750
					1270	2450	3150	720	1500	F8EB1500/3-3000/1270
				4	1270	2450	4150	720	1500	F8EB1500/3-4000/1270

* min quote working with only 4 pads and excluding two external arms : 1170 mm

