


Vacuum Metal Sheet Lifter serie F10EB 3000



Technical specification

Application	Metal sheet, stainless steel, aluminum, plastic panels
Lifting capacity	3000 kg
Suction pads	No. 10 suction pads in vulcanized rubber, diameter 390 mm Suction pads with spring supports Exclusion of suction pads by cross arm
Frame	Steel frame structure fixed in horizontal position The suction pads are distributed on three cross arms Adjustable position of suction pads and of cross arms
Operating system	Electric 400V 3 phase 50Hz or 220V 1 phase 50Hz > to specify at order
Vacuum system Safety systems	Vacuum circuit with vacuum reservoir, non-return valve, vacuum filter Vacuum gauge with colored scale Audio visual low vacuum warning powered independently and with back up battery
Weight of lifter	Depends on the configuration
Command	Suction and release by slide valve command with safety system

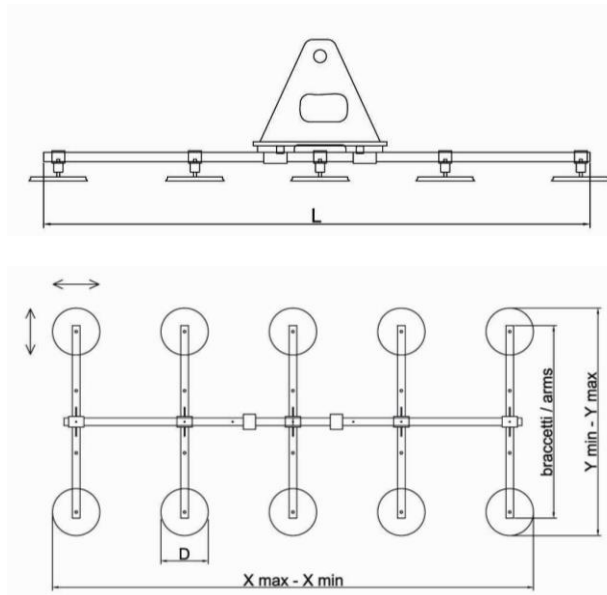

- **Electric operating system**

- 10 suction pad d.390 mm
- fixed frame for horizontal lifting
- lifting capacity 3000 kg

- Safety devices

Available models

Pads		Capacity	L	Arms		X (mm)		Y (mm)		Product Code
nr.	Ø	kg	mm	nr.	mm	min*	max	min	max	
10	390	2000	3000	5	1270	2530*	3230	800	1580	F10EB3000/4-3000/1270
			4000	5	1270	2530*	4230	800	1580	F10EB3000/4-4000/1270
			5000	5	1270	2530*	5230	800	1580	F10EB3000/4-5000/1270

* min quote working with only 4 pads and excluding two external arms : 1250 mm

