

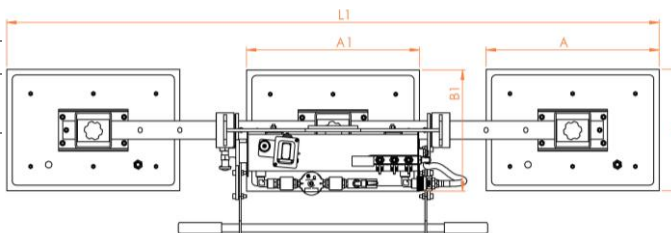


Vacuum Stone Lifter serie M3B

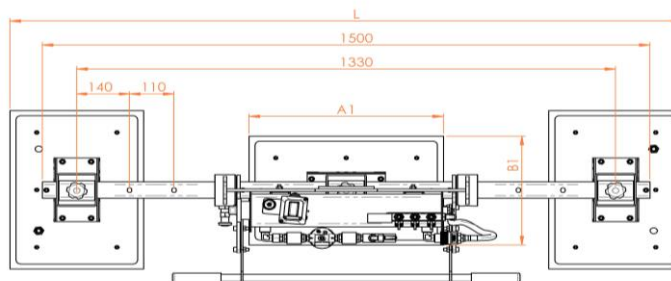

Technical specification

Application	Not porous stones
Lifting capacity	Up to 2000 kg
Suction pads	No. 3 rectangular suction pads
Load movement	0-90° manual tilt (horizontal/vertical)
Operating system	DC vacuum pump powered by on board batteries High capacity re-chargeable batteries Battery gauge
Vacuum system	Vacuum circuit, complete of vacuum reserve and non return valve
Weight of lifter	Depends on the configuration
Control	Slider valve control for suction/release on the lifter release of the load by dual action security command
Standard features	On-off double sliding valve with safety Audible and visual low vacuum warning devices Vacuum gauge with colored scale Battery charger 240 Volt

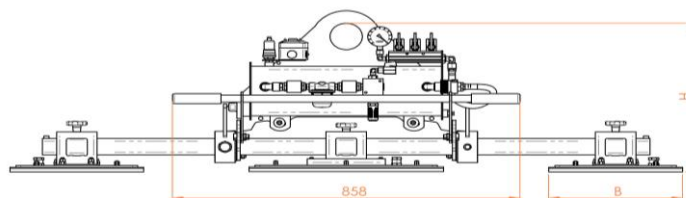

- self battery powered
- 3 suction pads
- tilting system from horizontal to vertical
- lifting capacity up to 2.000 kg
- Low vacuum warning device

Available models

Product code	Lifting capacity	Dimension of pads			
		Central pad		Lateral pads	
		A	B	A	B
M3B 375	375	480	230	480	230
M3B 625	625	480	230	480	330
M3B 750	750	480	330	480	330
M3B 900	900	480	330	630	330
M3B 1000	1000	630	330	630	330
M3B 1200	1200	630	280	630	430
M3B 1500	1500	630	430	630	430
M3B 2000	2000				

