

Vacuum Stone Lifter serie O4B




Technical specification

| | |
|-------------------|---|
| Application | Not porous stones |
| Lifting capacity | Up to 2000 kg |
| Suction pads | No. 4 rectangular suction pads on two arms |
| Crossbeam | L 1500 mm |
| Load movement | 0-90° oil dynamic tilt (horizontal/vertical) |
| Operating system | DC vacuum pump powered by on board batteries High capacity re-chargeable batteries Battery gauge |
| Vacuum system | Vacuum circuit, complete of vacuum reserve and non return valve |
| Weight of lifter | Depends on the configuration |
| Control | Slider valve control for suction/release on the lifter release of the load by dual action security command |
| Standard features | Audible and visual low vacuum warning devices Vacuum gauge with colored scale Battery charge indicator |

Available models

| Product code | Lifting capacity | A | B | H |
|--------------|------------------|-----|-----|-----|
| O4B 500 | 500 | 480 | 230 | 960 |
| O4B 1000 | 1000 | 480 | 330 | 960 |
| O4B 1500 | 1500 | 630 | 330 | 960 |
| O4B 2000 | 2000 | 630 | 430 | 960 |

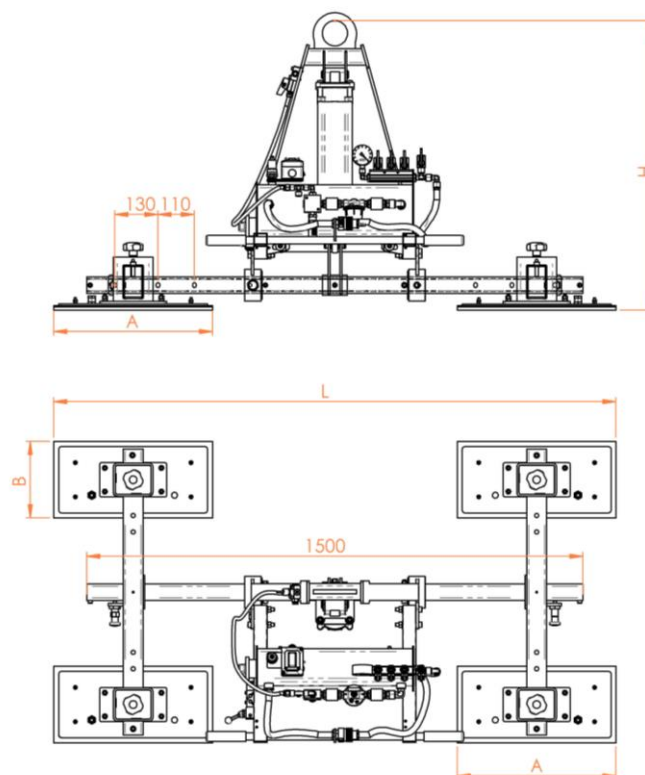

- self battery powered
- 4 suction pads
- oil dynamic tilting system
- lifting capacity up to 2.000 kg
- low vacuum warning device

