


# Vacuum Stone Lifter serie O4EB



## Technical specification

Application	Not porous stones
Lifting capacity	Up to 2000 kg
Suction pads	No. 4 rectangular suction pads
Load movement	0-90° oil dynamic tilt (horizontal/vertical)
Operating system	Electric operated vacuum pump 400V 3 phase or 220V single phase – specify at order
Vacuum system	Vacuum circuit, complete of vacuum reserve and non return valve
Weight of lifter	Depends on the configuration
Control	Slider valve control for suction/release on the lifter release of the load by dual action security command
Standard features	On-off double sliding valve with safety Audible and visual low vacuum warning devices Vacuum gauge with colored scale

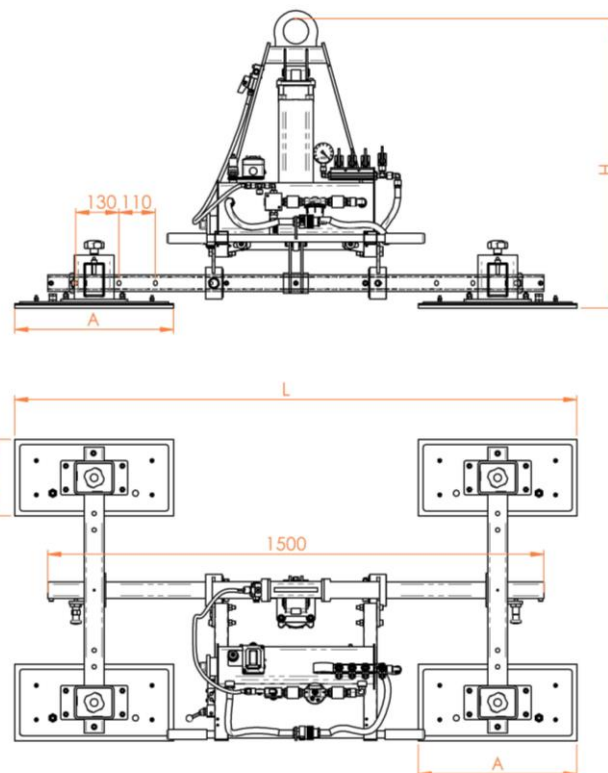

- electric operated
- 4 suction pads
- oil dynamic tilting system
- lifting capacity up to 2.000 kg
- low vacuum warning device

## Available models

Product code	Lifting capacity	A	B	H
O4EB 500	500	480	230	960
O4EB 1000	1000	480	330	960
O4EB 1500	1500	630	330	960
O4EB 2000	2000	630	430	960

