



# Valve technology | Non-return valves

## "Inline" non-return valves

### "Inline" non-return valves




#### Product notes

- > Maintenance of the vacuum level in suction systems in cases of vacuum generator failure
- > Can also be used with dense workpieces as an energy-saving system
- > Two-sided quick fittings for fast installation in existing vacuum systems
- > Robust metal bodies
- > Compact design
- > Can be mounted in any installation position

#### Technical data

Item no.	Effective surface area [mm <sup>2</sup> ]	Material	Weight [g]
32.631	2.7	Aluminum anodized	5
32.632	6.8	Aluminum anodized	9.5
32.633	15.5	Aluminum anodized	20
32.634	32	Aluminum anodized	61.5
32.635	46	Aluminum anodized	68

#### Dimensions

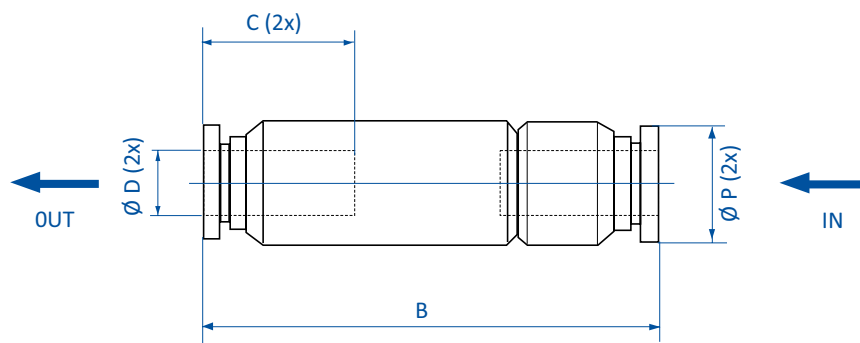

Item no.	Ø D [mm]	B [mm]	C [mm]	Ø P [mm]
32.631	4	34	11	9
32.632	6	38.5	12	12
32.633	8	55.5	18.5	15
32.634	10	82.5	21	25
32.635	12	87.5	23.5	25