## Valve technology | Throttle valve





"Inline" one-way flow control valves



## **Product notes**


- > Limitation of suction flow at a constant vacuum level
- > Reducing leakage at unoccupied vacuum cups maintains an adequate vacuum level for vacuum cups covered by products and thus prevents products from being dropped

  Manual adjustment using knurled screw

## **Technical data**

Item no.	Maximum flow rate [m³/h]	Regulating range [mbar (psi)]	Operating temperature [°C (°F)]	Weight [g]
73.001	2.4	-999 - 0 (-14.5 - 0)	-20 - 80 (-4 - 176)	95
73.004	5.4	-999 - 0 (-14.5 - 0)	-20 - 80 (-4 - 176)	95

## **Dimensions**

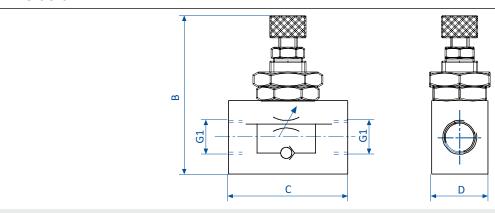

Item no.	G1	<b>B</b> [mm]	C [mm]	<b>D</b> [mm]
73.001	G1/4	60	39	22
73.004	G1/2	75	56	30

