




### Blanking plugs with O-ring seal – SZ-SCV

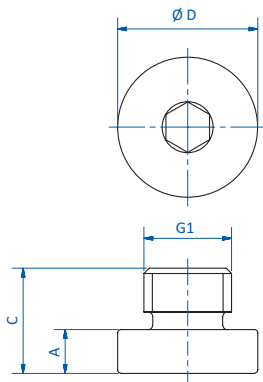


#### Technical data

Item no.	Material
<b>77.000</b>	Nickel-plated brass
<b>77.009</b>	Nickel-plated brass
<b>77.008</b>	Nickel-plated brass
<b>77.010</b>	Nickel-plated brass
<b>77.007</b>	Nickel-plated brass

#### Dimensions

G1 (male)	A [mm]	C [mm]	$\varnothing D$ [mm]
M5	2	6	8
G1/8	3	11	17
G1/4	3	9.5	14
G3/8	3.5	12.5	20
G1/2	3.5	13.5	25

### Threaded bushes – SZ-GA-FF

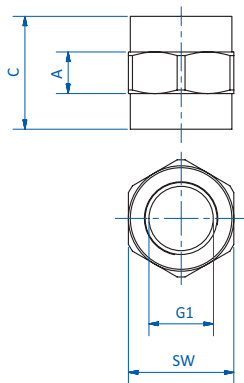


#### Technical data

Item no.	Material
<b>270.343</b>	Nickel-plated brass
<b>270.182.O</b>	Aluminum
<b>270.130.O</b>	Aluminum
<b>270.579</b>	Aluminum

#### Dimensions

G1 (female)	A [mm]	C [mm]	SW
G1/8	5.5	15	14
G1/4	20	20	19
G1/2	32	32	30
G3/8	23	23	22

### Reducing bushes – SZ-GA-RFF

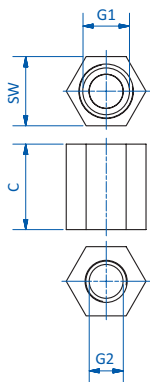

#### Technical data

Item no.	Material
<b>270.306</b>	Aluminum
<b>270.307</b>	Aluminum
<b>270.308</b>	Aluminum
<b>270.089</b>	Aluminum
<b>270.228</b>	Nickel-plated brass

#### Dimensions

G1 (female)	G2 (female)	C [mm]	SW
G1/8	M5	14	13
G1/8	M6	14	13
G1/4	M6	17.5	17
G1/4	M10	21	17
G3/8	G1/4	21.5	22