



### Stationary air nippers – horizontal with stroke



#### Product notes

- > Nippers, lightweight and compact, for easy assembly in restricted spaces
- > To be used with cutting stations or automated equipment
- > Stroke single-acting with return spring
- > Horizontal, adjustable stroke enables cutting flush to the workpiece
- > Connection via hose nipples or quick fittings
- > Version (-R): push stroke models
- > All others: pull stroke models
- > Max. opening width and length "K" refer to blades with index "AJ" or "RAJ"
- > Blades are not included in the scope of delivery. Please order separately.

#### Technical data


Item no.	Max. cutting force [N]	Air consumption [cm <sup>3</sup> /stroke]	Max. stroke [mm]	Effective direction	Operating pressure [bar (psi)]	Pipe connection with hose nipple [mm]	Pipe connection with quick connect fittings [mm]	Weight [g]
<b>GT-NY05</b>	343	48	3	Pull	4 - 5 (58 - 72.5)	2.5	--	155
<b>GT-NY05R</b>	343	48	3	Push	4 - 5 (58 - 72.5)	2.5	--	155
<b>GT-NY05-4</b>	343	48	3	Pull	4 - 5 (58 - 72.5)	--	4x2,5	155
<b>GT-NY05R-4</b>	343	48	3	Push	4 - 5 (58 - 72.5)	--	4x2,5	155
<b>GT-NY10</b>	490	68	3	Pull	4 - 5 (58 - 72.5)	2.5	--	210
<b>GT-NY10R</b>	490	68	3	Push	4 - 5 (58 - 72.5)	2.5	--	210
<b>GT-NY10-4</b>	490	68	3	Pull	4 - 5 (58 - 72.5)	--	4x2,5	210
<b>GT-NY10R-4</b>	490	68	3	Push	4 - 5 (58 - 72.5)	--	4x2,5	210
<b>GT-NY15</b>	784	136	3	Pull	4 - 5 (58 - 72.5)	2.5	--	319
<b>GT-NY15R</b>	784	136	3	Push	4 - 5 (58 - 72.5)	2.5	--	319
<b>GT-NY15-4</b>	784	136	3	Pull	4 - 5 (58 - 72.5)	--	4x2,5	319
<b>GT-NY15R-4</b>	784	136	3	Push	4 - 5 (58 - 72.5)	--	4x2,5	319
<b>GT-NY25</b>	980	184	5	Pull	5 - 6 (72.5 - 87)	4	--	580
<b>GT-NY25R</b>	980	184	5	Push	5 - 6 (72.5 - 87)	4	--	580
<b>GT-NY25-6</b>	980	184	5	Pull	5 - 6 (72.5 - 87)	--	6x4	580
<b>GT-NY25R-6</b>	980	184	5	Push	5 - 6 (72.5 - 87)	--	6x4	580



# Nipper technology | Air nippers – stationary

Stationary air nippers – horizontal with stroke

## Dimensions

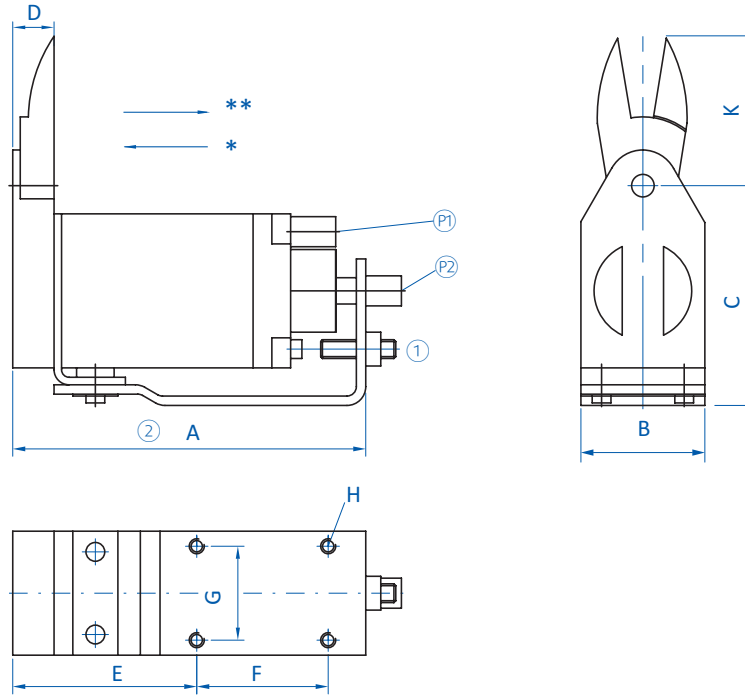

Ⓟ = Compressed air connection for cutting Ⓠ = Compressed air connection for stroke \* = Push stroke (Version -R) \*\* = Pull stroke  
 ① = Stroke adjustment  
 ② = Models NY-R: A = Distance from start of nipper to cutting position / Models NY: A = Distance from start of nipper to starting position

Item no.	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H	K [mm]
GT-NY05	75.9	23	48	8.6	41	25	15	M4	22
GT-NY05R	75.9	23	48	8.6	41	25	15	M4	22
GT-NY05-4	75.9	23	48	8.6	41	25	15	M4	22
GT-NY05R-4	75.9	23	48	8.6	41	25	15	M4	22
GT-NY10	82.1	28	52	8.8	42	30	20	M4	24
GT-NY10R	82.1	28	52	8.8	42	30	20	M4	24
GT-NY10-4	82.1	28	52	8.8	42	30	20	M4	24
GT-NY10R-4	82.1	28	52	8.8	42	30	20	M4	24
GT-NY15	93	33	58	10	48	35	25	M4	27
GT-NY15R	93	33	58	10	48	35	25	M4	27
GT-NY15-4	93	33	58	10	48	35	25	M4	27
GT-NY15R-4	93	33	58	10	48	35	25	M4	27
GT-NY25	109	42	69	13	55	40	30	M5	31
GT-NY25R	109	42	69	13	55	40	30	M5	31
GT-NY25-6	109	42	69	13	55	40	30	M5	31
GT-NY25R-6	109	42	69	13	55	40	30	M5	31